

Flo-View™

SANITARY FLOW INDICATOR

*Put a window
in your
processing
systems
with the
Sanitary
Flow Indicator!*

APPLICATIONS

The Flo-View™ Sanitary Flow Indicators may be installed in any position to observe fluid flow in any direction. The sight flow indicator is usually employed to detect either the presence or absence of solutions, or to observe fluids for turbulence, color or clarity. The Flo-View™ Sanitary Flow Indicators are ideal for high purity applications!


FEATURES

- SIP/CIP
- Sterilizable – Autoclavable
- Stress, Crack and Shatter Resistant
- High Temperature and Pressure Resistant
- Unique O-Ring Seal Design Minimizes Bacteria Traps
- Built-in Mechanical Stop – No Over Tightening of Glass Insert
- Meets FDA and 3A Specifications
- Full Material Traceability



Flo-View™

SANITARY FLOW INDICATOR

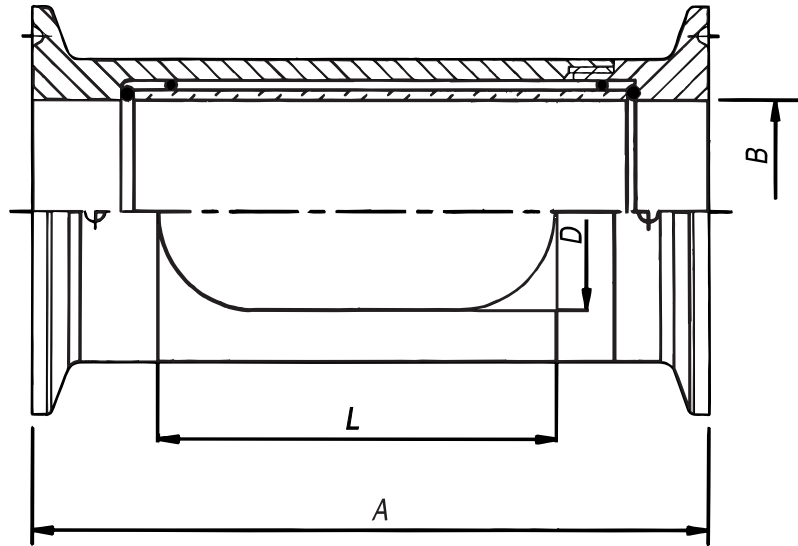

Sanitary Flow Indicator

Size Tube O.D. [inch]	Part Number	A [mm]	B [mm]	Viewing Window L x D [mm]		Size Clamp [inch]
1/2	FVC053160	76	9.4	32	16	3/4
3/4	FVC073160	87	15.7	30	20	3/4
1	FVC103160	91	22.1	33	33	1-1/2
1-1/2	FVC153160	103	34.8	48	48	1-1/2
2	FVC203160	120	47.5	55	50	2
2-1/2	FVC253160	150	60.2	55	50	2-1/2
3	FVC303160	173	72.0	90	60	3
4	FVC403160	200	97.4	110	70	4

In the interests of development and improvement of the product, we reserve the right to change the specifications.

Standard Material of Construction

- 316L SS
- Optional: Hastelloy

Standard Gasket Material

- EPDM
- Optional: Viton, FEP Jacketed

Insert Material

- Borosilicate

Maximum Temperature & Pressure Ratings

Borosilicate Insert

- 100 PSI @ 250°F
- 150 PSI @ 70°F

Finish, Product Contact Surface

- Ra ≤ 20 Micro Inch, 220 Grit EP

AUTHORIZED DISTRIBUTOR